



# Pushbutton Switches

## Anti-Vandal Pushbutton Switch - Mounting Hole Ø16mm


## PAV16 Series



Terminal Type: Solder Lug 2x0.5mm  
Front Shape: Flat Round  
Illumination: Dot Illuminated



Top View





Terminal Arrangement


PAV16NFS1GN



Terminal Type: Solder Lug 2x0.5mm  
Front Shape: Flat Round  
Illumination: Ring Illuminated



Top View



Terminal Arrangement

PAV16NFS2CN


### LED SPECIFICATIONS

Color	Red	Yellow	Orange	Green	Blue	White
Rated Voltage (Ue)	AC/DC 1.7 V			AC/DC 2.8 V		
Rated Current (Ie)	20 mA					
Life	40,000 hours					


Formula

$$R = \frac{U - U_e}{I_e}$$

Current-Limiting Resistance Configuration Table	Operating Voltage (U)				6V	12V	24V	36V
	Current-Limiting	Red	Yellow	Orange	210Ω, 1/4W	510Ω, 1/2W	1.2KΩ, 3/4W	2.2KΩ, 1W
		Green	Blue	White	160Ω, 1/4W	460Ω, 1/2W	1.2KΩ, 3/4W	2.2KΩ, 1W

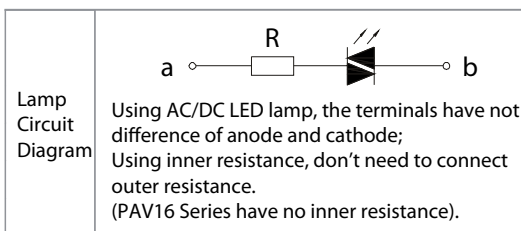

### SWITCHING



### TERMINALS



## How to order:

PAV16 1 2 3 4 5 6

### 1 SWITCHING CIRCUIT:

- N 1NO (Standard)
- C 1NC (Made by request)

### 2 FRONT SHAPE:

- D Domed (only non-illuminated)
- F Flat Round
- H High Round (only non-illuminated)

### 3 TERMINATION:

- W Screw (only non-illuminated)
- S Solder Lug

### 4 ILLUMINATION:

- 0 No Illumination
- 1 Dot Type Illumination
- 2 Ring Type Illumination

### 5 LED COLOR:

- N No Illumination
- C Red F Green E Yellow
- D Orange G Blue B White

### 6 ENGRAVING:

- A Stop B Start C Return D Reset
- E | F || G ◀ H ▶
- J ■ K ⏻ L ⚡ M ⏸
- N ○ (Other engraving can be made by request)

## Specifications:

### CHARACTERISTICS

- > Protection Degree: IP65
- > Anti Vandal Degree: IK08
- > Switch Rating: 2A 36VDC
- > Operation Type: Momentary
- > Contact Configuration: 1NO or 1NC
- > Contact Resistance: 50mΩ Max.
- > Insulation Resistance: 1000MΩ Min.
- > Dielectric Intensity: 2000VAC
- > Operating Temperature: -20°C to +55°C
- > Mechanical Life: 1,000,000 cycles
- > Electrical Life: 200,000 cycles
- > Panel Thickness: 1 to 6 mm
- > Torque: 5 to 14 Nm
- > Operation Pressure: about 4 N
- > Operation Travel: about 1.5mm
- > Switching: Double-Break Slow-Motion Contact

### MATERIAL

- > Contact: Silver alloy
- > Button: Stainless steel
- > Body: Stainless steel
- > Base: PBT



# Pushbutton Switches

## Anti-Vandal Pushbutton Switch - Mounting Hole $\text{\O}16\text{mm}$

## PAV16 Series



Terminal Type: Screw Terminal  
 Front Shape: Domed  
 Illumination: Non Illuminated





Top View

PAV16NDW0NN



Terminal Type: Screw Terminal  
 Front Shape: Flat Round  
 Illumination: Non Illuminated





Top View

PAV16NFW0NN



Terminal Type: Screw Terminal  
 Front Shape: High Round  
 Illumination: Non Illuminated





Top View


PAV16NHW0NN



Terminal Type: Solder Lug  
 Front Shape: Domed  
 Illumination: Non Illuminated



Top View





Terminal Arrangement


PAV16NDS0NN



Terminal Type: Solder Lug  
 Front Shape: Flat round  
 Illumination: Non Illuminated



Top View





Terminal Arrangement


PAV16NFS0NN



Terminal Type: Solder Lug  
 Front Shape: High round  
 Illumination: Non Illuminated



Top View



Terminal Arrangement

PAV16NHS0NN